


Technology that simply connects.



Since over 75 years quality & innovation for the plumbing trade.


# HT/SML-PIPECONNECTOR

For the realization of a connection of PP (HT) pipes according to DIN EN 1451-1 with cast iron pipes according to DIN EN 877.

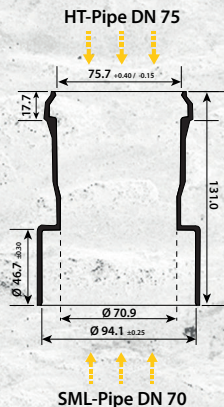


**Item No. 6361**

**HT DN 75 / SML DN 70 (DA 78 mm)**

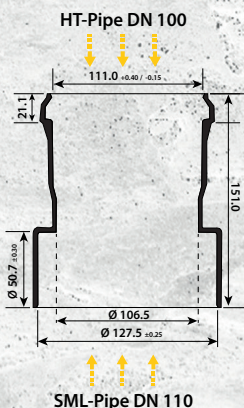


**Item No. 6362**

**HT DN 110 / SML DN 100 (DA 110 mm)**

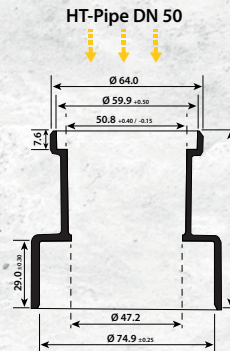

**Item No. 6360**

**HT DN 50 / SML DN 50 (DA 58 mm)**



**Item No. 6365**

**HT DN 75 / SML DN 75 (DA 83 mm)**



## Technical features:

- Pressure-tight: 0,5 bar
- Temperature resistance up to +95° C for short periods
- Material made of impact-resistant polypropylene
- Elastomer seals in accordance with DIN EN 681-1
- Fire behavior according to DIN 4102-1 (B2)
- Application area B
- DIBt approval no.: Z-42.5-602