

Technology that simply connects.

HAAS[®]
Nürnberg



Since over 75 years quality & innovation for the plumbing trade.

OHA-SEALING-SLEEVE

ACCORDING TO DIN 18534

**ACCORDING TO
DIN 18534
SEALING IS
MANDATORY!!!**

The advantages at a glance:

- stable 2-component solution (hard / soft)
- particularly easy to install
- Stretch zones cuff: 150x150mm, Stretch zones diameter: Ø 50mm and hole diameter: Ø 20 mm
- sealing inside and out
- easy to shorten
- suitable for almost all standard ½" construction plugs and ½" wall washers
- targeted collection of leaking and running water
- no destruction of the seal by removing the construction plug
- permanent splash guard
- easy subsequent replacement of fittings



Item No. 6635


OHA-Dichtfix ½"

- 2-COMPONENT SOLUTION (HARD / SOFT)
- ESPECIALLY EASY TO INSTALL


Productvideo



mounting possibilities:



a: For the drywall



b: For conventional wall mounting (wall version)

OHA-Dichtfix-Sealing Sleeve

Item No.	Description:
6635	OHA-Dichtfix ½" yellow/black for the use of OHA-Constructionplugs
6615	OHA-Dichtfix ¾" blue/black for the use of OHA-Constructionplugs

Item No. 6611

OHA-Stretch-Zones-Cuff



OHA-Stretch-Zones-Cuff

Item No.	Colour:	Description:
6611	yellow	Stretch-zones-cuff 150 x 150 x 0,6 mm



Item No. 6660

OHA-Dichtfix-Combi-Package

Item No.	Quantity:	Description:
6660	8 pcs.	Dichtfix Sealing Sleeve
	4 pcs.	Brass construction plug ½" red
	4 pcs.	Brass construction plug ½" blue



Patent!!!







QUALITY PRODUCTS MADE BY **HAAS** - Innovative! Permanently! For sure!







Gießener Str. 5 • 90427 Nürnberg • Phone +49 911 9366-0 • www.haas.de • info@haas.de
All prices are net prices plus statutory VAT at the time of delivery! The general terms and conditions 01/2016 of Otto Haas KG apply, www.haas.de. Errors and changes reserved.








Dry wall option

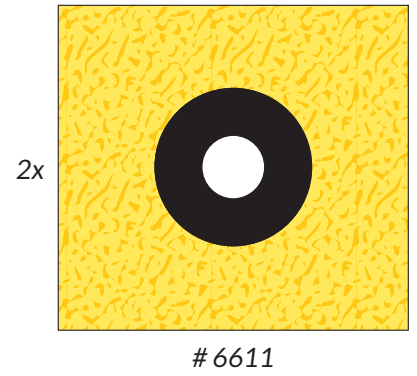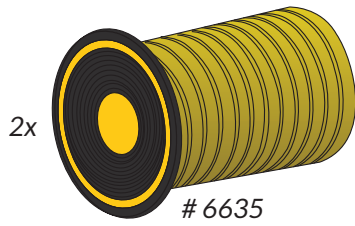

according to DIN 18534-1

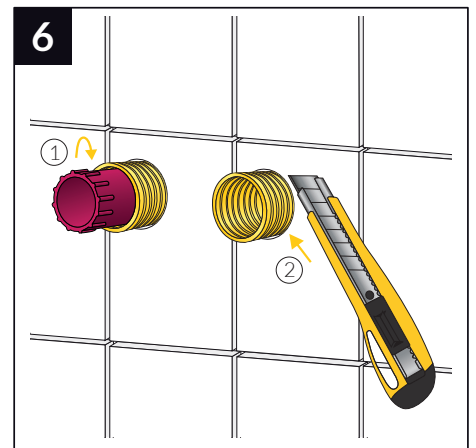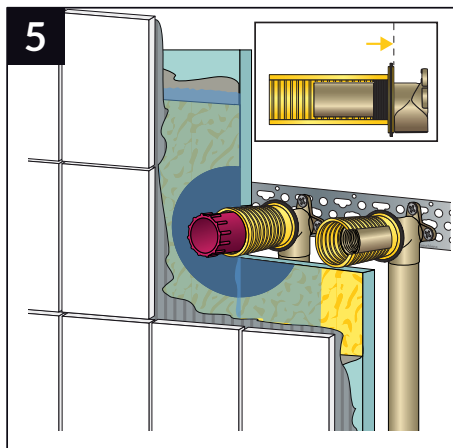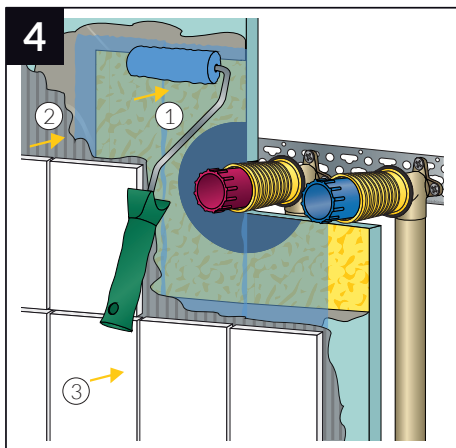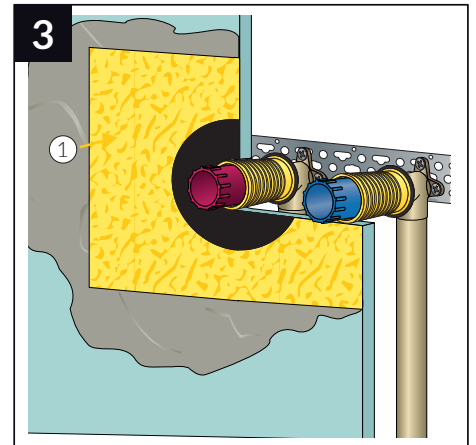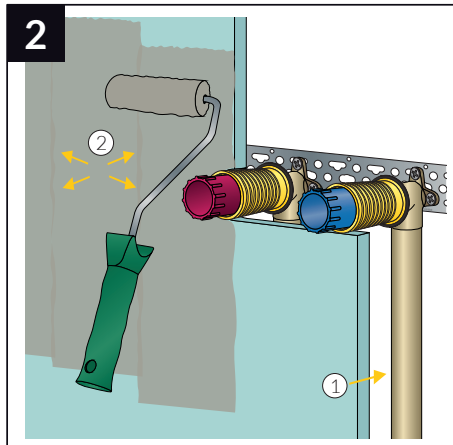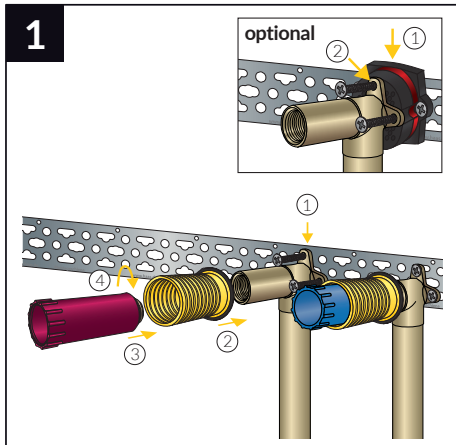

optional +



Productvideo

