



Flood Barrier

OHA-Flood Barrier DN 50

with PP-Washingmachines-Siphon,
closeable, Backwater double and
emergency closure

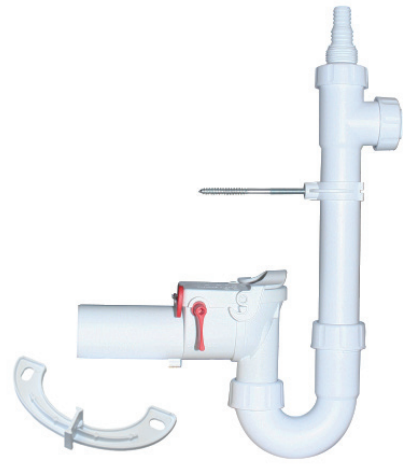

6705



The **Flood Barrier**, (**backwater valve acc. to DIN EN 13564 Type 5**) for Faecal-free wastewater with two self-contained closures and an emergency stop prevents backflow of the dirty water in the event of backwater, whereby the emergency stop can be manually operated and locked. **The maintenance** is acc. to DIN EN 13564 **two times yearly** be carried out by qualified personnel, in addition, the barrier must be cleaned and any defective parts replaced.

ATTENTION:

- It must be ensured that the OHA blocking device is installed straight and without tension. When installing, observe the "flow direction".
- Before using a spiral, the locking mechanism must be removed!
- In the event of backflow, considerable pressure can build up in the piping system and affect the body. This can lead to a pressing out of the barrier from the drain line. In order to prevent this, the locking mechanism must be additionally fastened.

