

## Sanitär / Installation

### Waste water connection siphon "Schmalhans"

# ... **VERY EASY** **DRINKING** **WATERPROTECTION**

**FREE DRAINAGE**  
**ACC. DIN EN 1717**



WITH CLEANING PORT


#### Item No. 6790:

#### Description:

Multifunctional safety funnel in sophisticated design, made of impact-resistant polypropylene and rubber nipple for DN 32/40/50. Free drainage according to DIN 1717.

#### Technical features:

- Protection of drinking water installations against contamination
- Separation of drinking water and drainage systems
- Prevention of incorrect installation
- Multifunctional thanks to universal application possibilities
- Monitoring and detection of unnecessary water losses
- Enclosed fastening clip secures the siphon against slipping out
- Easy cleaning thanks to 1" (AG) cleaning opening on the front
- Connection nozzle suitable for hoses with an inner diameter of 8 mm and 12 mm
- Integrated odor trap with a water seal height of 50 mm
- Extra narrow – maximum installation depth of 52 mm (including bracket)
- Very good chemical resistance
- Flow rate: 8 mm nozzle = 800 l/h, 12 mm nozzle = 1300 l/h, 8 and 12 mm nozzle = 1500 l/h.
- For small water softening systems up to a maximum of 1.2 m<sup>3</sup>/h

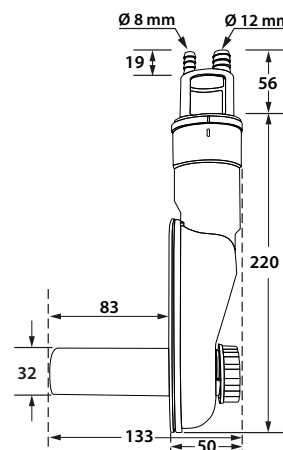

## Sanitär / Installation

### Waste water connection siphon - various versions



#### Item No. 6791:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 outlet pipe and angled hose nozzle in 8 mm.  
Flow rate:  
8 mm nozzle = 360 l/h

WITH CLEANING PORT



#### Item No. 6792:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 outlet pipe and angled hose nozzle in 10 mm (3/8").  
Flow rate:  
10 mm nozzle = 360 l/h

WITH CLEANING PORT



#### Item No. 6793:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 outlet pipe and angled hose nozzle in 12 mm (1/2").  
Flow rate:  
12 mm nozzle = 360 l/h

WITH CLEANING PORT



#### Item No. 6794:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 outlet pipe and angled hose nozzle in 19 mm to 23 mm (3/4" auf 1") with backflow preventer SAVE.  
Flow rate:  
19 mm nozzle = 720 l/h

WITH CLEANING PORT



#### Item No. 6797:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 and two angled hose nozzle in 19 mm auf 23 mm (3/4" to 1") with backflow preventer SAVE. Flow rate:  
19-23 mm nozzle = 1080 l/h

WITH CLEANING PORT



#### Item No. 6798:

##### Description:

Wastewater connection siphon with rubber nipple for DN 32/40/50 outlet pipe and angled hose nozzle in 19 mm (3/4") with backflow preventer SAVE.  
Flow rate:  
19-23 mm nozzle = 900 l/h

WITH CLEANING PORT